

System Data Sheet

Barrikade Deco Flakes

Barrikade®

Decorative Multi-coloured coating

Description:

Barrikade Deco Flakes comprises of a decorative PVA flake bound in synthetic resins. A pigmented binder is fully broadcasted with flakes and topcoated two times with UV resistant topcoats.

The finish provides an attractive, durable surface that is impervious and easily maintained.

Areas of use:

Barrikade Deco Flakes is suitable for general amenity areas such as showers, washrooms, changing facilities, public areas, lift shafts, stairwells, corridors, schools, offices, laboratories, shops etc.

Advantages:

- Hard wearing
- Wide choice of colour combinations
- Decorative
- Easy to clean and Hygienic
- Good chemical resistance
- Very good UB stability

Substrates:

Concrete, cement render and screeds ground with diamond grinding machine

Properties:

Chemical


Barrikade Deco Flakes gives you a waterproof, seamless surface with excellent resistance to many chemicals. The flooring system is suitable for areas where spillage of alkalis, oil, fat and solvents occurs, but has limitations when it comes to large concentration of acids

Mechanical

Barrikade Deco Flakes has excellent mechanical properties regarding compression and impact loads and is very hard-wearing.

Thermal

Barrikade Deco Flakes in general is resistant to temperatures up to 60 °C.

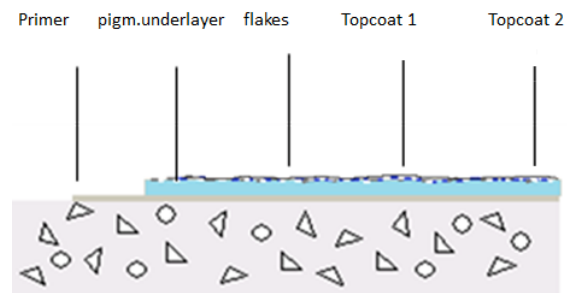

System Build up:

Primer Barrikade EP-PB pigmented
 Underlayer – Barrikade EP- SL undercoat pigmented
 Flakes
 Topcoat 1 Barrikade EPXLY
 Topcoat 2 Stenolakk with diamond powder

Technical data

Product	Barrikade Deco Flakes
Adhesion	3.4 Mpa
Wear resistance	AR 0.5
Impact resistance	IR 8

StoCretec Flooring AS,
 Værftsgt. 7 A, N-1510 Moss,
 Tel. 69 27 30 00 - Fax. 69 27 46 30
 E-post: stocretec.no@sto.com
www.stocretec.no