

## System Data Sheet

**Barrikade EP-600****Barrikade®**

Epoxy coating

**System description:**

**Barrikade EP-600** is a two component solvent free pigmented thin film epoxy coating for surface treatment of concrete floors and other cement based surfaces. **Barrikade EP-600** provides a seamless, hard wearing and chemical resistant finish.

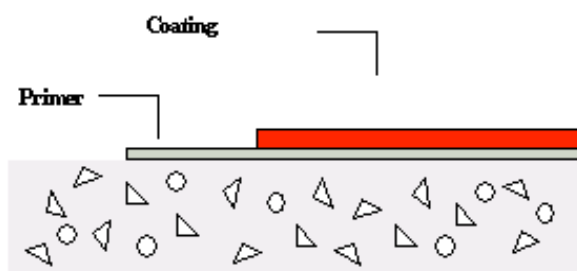
**User areas:**

**Barrikade EP-600** is suitable as a coating system for warehouses, light duty manufacturing, utility areas etc.

**Substrate / surface preparation:**

The substrate shall be concrete, minimum C25, clean and free of laitance, oil and grease and loose or friable particles which may affect adhesion. The surface is prepared with automatic shotblasting, grinding or scabbling. The surface should be vacuumed.

Old paint with bad adhesion must be removed completely.

**Build up:****Primer:**

The concrete substrate is primed with **Barrikade EP-PB** epoxyprimer.

**Coating:**

**Barrikade EP-600.**

**Repairs:**

Eventual local levelling / repairs of the concrete substrate is carried out with **Barrikade EP-Repair Mortar** or **Barrikade EP-Repair Putty** or **Barrikade EP-PB** mixed with filler, natural sand or tixotropic agents.



Build up: EP PB 0,3 kg/m<sup>2</sup>  
EP 600 0,3-0,6 kg/m<sup>2</sup>

StoCretec Flooring AS,  
Værftsgt. 7 A, N-1510 Moss,  
Tel. 69 27 30 00 - Fax. 69 27 46 30  
E-post: [stocretec.no@sto.com](mailto:stocretec.no@sto.com)  
[www.stocretec.no](http://www.stocretec.no)